

GEOCHEM

MULTI PURPOSE SEALER


MULTI PURPOSE CLEAR ACRYLIC SEALER

Geochem Multi Purpose Sealer is a clear acrylic penetrating sealer that's hard wearing, give reduced dusting and improved resistance to sunlight, water, oils, petrol, grease, fungal/moss growth etc.

Geochem Multi Purpose Sealer is designed for external sealing of brick, concrete block pavers, flagstones and related surfaces.

Geochem Multi Purpose Sealer:

- Dries clear, give a low sheen non slip finish. However more coats will give a glossier finish
- Will provide enhanced colour as well as extending the life of the product.
- Contains fungicide to provide resistance to the growth of algae, moss, lichen and weeds
- Enhances colour and prolongs product life
- On block paving will act as a sand stabiliser
- Non yellowing

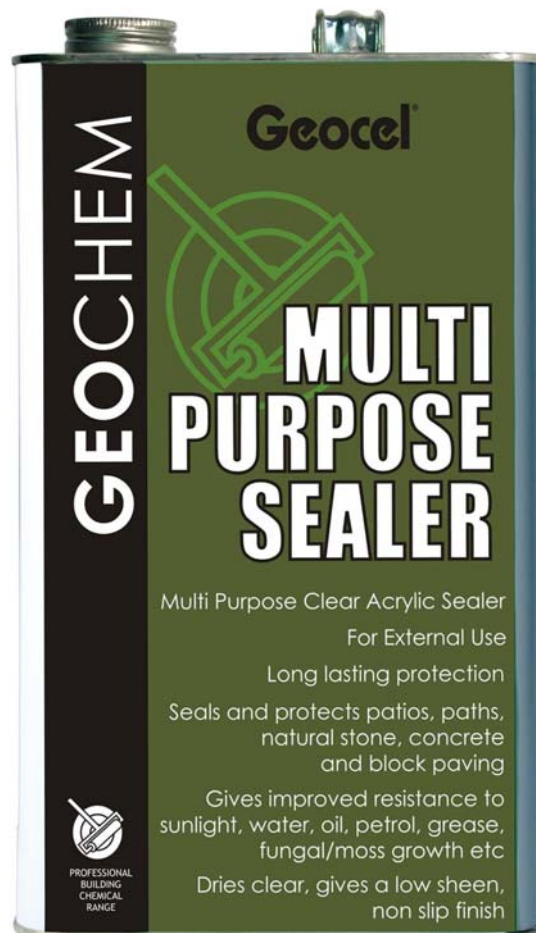

**PROFESSIONAL
BUILDING
CHEMICAL
RANGE**

TECHNICAL DATA

Form	Liquid
Storage Life	12 Months stored between 5°C and 25°C in original containers

Specification writers: These values are not intended for use in preparing specifications. Please contact your local **Geocel® Sales Representative** prior to writing specifications on this product.

SURFACE PREPARATION

Ensure all surfaces are clean, dry and sound. **Geochem Multi Purpose Sealer** should not be applied over previous sealers (Incompatibility may occur). Remove all loose flaking material, ensure surface is free of all grease, oil, release agents etc. All organic growth must be destroyed ie, mould, moss, mildew and fungi with **Geochem Mould and Mildew Cleaner**.

APPLICATION

Apply **Geochem Multi Purpose Sealer** undiluted using a brush, roller or squeegee. Ensure no ponding occurs. Coverage will be dependent upon the porosity of the surface being treated, but 2 coats are normally applied. Allow 4 hours drying time between coats.

Ideally **Geochem Multi Purpose Sealer** should only be applied when no rainfall is expected prior to drying of the treated surface.

COVERAGE

Approximately 5 – 7 sq. metres per litre depending upon porosity of surface.

Always test a small area to determine suitability before continuing.

CLEANING

Clean equipment with white spirit.

PACKAGING

Geochem Multi Purpose Sealer is available in 5 litre containers packed in boxes of 4 and 25L drums.

HEALTH AND SAFETY

Flammable flash point >40°C refer to full Health and Safety data sheet, available on request. Use in well ventilated area. EU limit value for this product (Cat H/h) 750g/L. This product contains maximum 724g/L VOC.

TECHNICAL SERVICE

For further technical information, advice on suitability for specific applications, or detailed Health and Safety information, contact **Geocel® Technical Service**.

IMPORTANT NOTE The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that Geocel's products are safe, effective and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Geocel's sole warranty is that the product will meet the Geocel sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

Geocel specifically disclaims any other express or implied warranty of fitness for a particular purpose or merchantability.

Geocel disclaims liability for any incidental or consequential damages.

Geocel®

Geocel Limited

Western Wood Way, Langage Science Park, Plympton, Plymouth, Devon, PL7 5BG

Tel: 01752 334350 Fax: 01752 202065 Email: info@geocel.co.uk

www.geocel.co.uk